

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/056571 A1

(51) International Patent Classification⁷: **B41J 2/05, 2/175**

(21) International Application Number:
PCT/IT2003/000842

(22) International Filing Date:
19 December 2003 (19.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO 2002 A 001113
23 December 2002 (23.12.2002) IT

(71) Applicant (for all designated States except US):
OLIVETTI I-JET S.P.A. (IT/IT); Località Le Vieux,
I-11020 Arnad (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SCARDOVI,**

Alessandro (IT/IT); c/o Olivetti I-Jet S.p.A., Località Le Vieux, I-11020 Arnad (IT). **CONTA, Renato** (IT/IT); c/o Olivetti I-Jet S.p.A., Località Le Vieux, I-11020 Arnad (IT).

(74) Agent: **BOBBIO, Giampiero**; c/o Telecom Italia S.p.A.-CLA Sede di Ivrea, Via G. Jervis, 77, I-10015 Ivrea (TO) (IT).

(81) Designated States (national): AU, BR, CA, CN, HU, ID, IL, IN, JP, KR, MX, RU, SG, TR, US, YU, ZA.

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AU, BR, CA, CN, HU, ID, IL, IN, JP, KR, MX, RU, SG, TR, YU,

[Continued on next page]

(54) Title: **INTEGRATED PRINthead WITH ENCODING CIRCUIT**

20

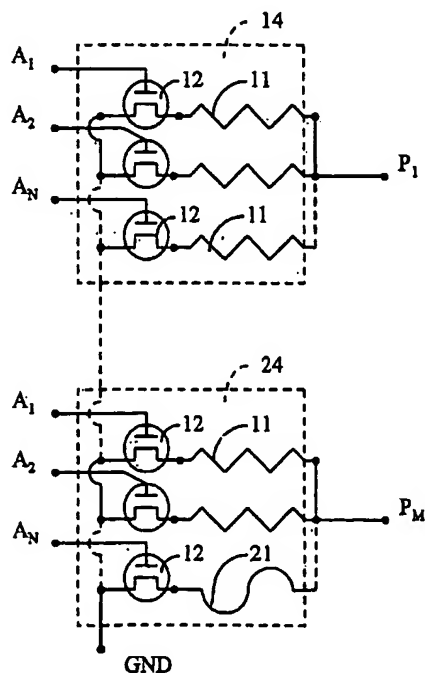

(57) Abstract: Ink jet printhead comprising a driving and encoding circuit (20) having a grid-like structure, including a plurality of inputs (24), a plurality of selecting elements (12), a plurality of actuating elements (11) and at least one identifying element (21) of said printhead. Each identifying element (21) is associated with a corresponding selecting element (12) and corresponds to nodes arranged along a row or column of said grid-like structure, and is scanned, together with said actuating elements (11), during a preliminary checking step.

WO 2004/056571 A1



ZA, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTEGRATED PRINthead WITH ENCODING CIRCUIT

Technological area of the invention – This invention relates to a thermal type ink jet printhead, in which a plurality of actuating elements are activated
5 selectively by an external control circuit, to cause the ejection of ink droplets through nozzles placed in correspondence with the actuating elements themselves.

In particular, this invention relates to an integrated printhead, comprising in the integrated circuit elements identifying the head itself, in accordance with the
10 description provided in the main claim.

Technical background – The constitution and general mode of operation of a thermal type ink jet printhead, and in particular of the type known as "top shooter", i.e. that emits the ink droplets in a direction perpendicular to the actuating assembly, are already widely known in the art, and therefore will
15 not be described in detail here, while only some characteristics of relevance for the purposes of the understanding of this invention will be described more particularly.

With reference to Fig. 1, an integrated printhead (head) 10, according to the known art, is made of an integrated circuit, for instance NMOS or bipolar type and comprises a plurality of nozzles 31, positioned on the head 10
20 according to a predefined order and suitable for ejecting ink on a medium, generally of paper, and a plurality of inputs or contacts 23; provided for connecting the head 10 to an external control circuit, suitable for commanding the selective actuation of the various nozzles 31.

The known head 10 (Fig. 2) is made of a grid-like driving circuit (MxN) comprising a plurality M of actuating assemblies 14. Each actuating assembly 14 in turn comprises a plurality N of selecting elements or transistors 12 and an equivalent number of actuating elements or resistors 11 which are provided for causing, in a known way, ejection of the ink from the nozzles 31.
25

Also described by the US patent 5,363,134 is an integrated printhead that comprises an encoding circuit, in which, by burning programmable fuses, information can be stored about the general characteristics of the head, such as for instance: colour head, its resolution, number of nozzles.
30

The encoding circuit is integrated on the same substrate as the selecting and activating circuit of the resistors and is composed of a row of programmable fuses, each of which is connected in series with a transistor.

Besides, each couple comprising a fuse and a transistor of the encoding circuit, is permanently connected to an Address Line and has the advantage of permitting reading of the coding stored without increasing the number of head connections.

It is in fact advantageous to have the possibility of identifying, through the printer's control circuit, a set of head characteristics, stored during the production of the head, that can cause a non-uniformity of operation between the various nozzles, considerably worsening the print quality.

Some of the characteristics that may be stored are, for instance, misalignments or differences of shape, diameter or centre distance between the nozzles.

In possession of this information, the control circuit can compensate, by varying the energy supplied to the resistors, any differences in volume of the ink droplets or of speeds which are caused by these non-uniformities.

This solution has the disadvantage, however, of adding an encoding circuit, formed by N couples of fuses and transistors, where N is the number of addresses in the grid, to those already existing on the head, with a relative increase in the surface area of the integrated circuit and greater costs and manufacturing difficulties. In addition, the encoding circuit can contain at most N fuses.

Summary of the Invention

The object of this invention is to produce an encoding of the head by using free positions of the grid-like circuit of the head, without having to add a new circuit for the encoding.

A second object is that of using circuits already existing in the driver of the head for reading of the encoding, without having to build a specific circuit, modifying only the software.

A third object is that of producing an encoding of the head using the already present circuits mentioned above, to which only a line of fuses for the encoding is added.

A fourth object is to produce an encoding with a number of fuses greater than the number of addresses.

These objects are attained by the integrated printhead of the invention, according to the characteristic parts of the main claims.

5 These and other characteristics of this invention will become clear from the following description, provided by way of non-restrictive example, with the aid of the accompanying drawings.

LIST OF FIGURES

Fig. 1 represents a schematic assembly view of an integrated printhead according to the known art;

Fig. 2 represents a wiring diagram of the circuit elements of an integrated printhead according to the known art;

Fig. 3 represents a block diagram of the control circuit of the head according to the invention;

15 Fig. 4 represents a wiring diagram of the circuit elements of an integrated head according to the invention;

Fig. 5 represents a wiring diagram of the circuit elements of a second embodiment of an integrated head according to the invention;

20 Fig. 6 represents a block diagram of a second embodiment of the control circuit of the head according to the invention.

DESCRIPTION

First embodiment

With reference to Fig. 4, an integrated printhead (head), according to the invention, is made up of an integrated circuit, for example NMOS or bipolar type, and comprises a driving and encoding circuit 20, consisting of a plurality of actuating assemblies 14, of known type, and a plurality of actuating assemblies with encoding or encoding assemblies 24.

Each actuating assembly 14, of known type, comprises a plurality of actuating elements or resistors 11, which are provided for causing ejection of the ink droplets from the nozzles 31, and corresponding selecting elements or transistors 12.

In each actuating assembly 14, each transistor 12, of known type, has its drain terminal connected to one of the two terminals of the resistor 11, the

source terminal connected in common to the sources of the transistors 12 belonging to the same actuating assembly 14, and the gate terminal connected to the inputs or contacts 23 corresponding to address selection lines (Address Line Select or addresses) $A_{i=1-N}$.

5 The resistors 11 belonging to an actuating assembly 14 have the second terminal connected in common and to an input or contact 23 corresponding to a primitive feeding line (Primitive Select or primitive) $P_{j=1-M}$.

Each encoding assembly 24 comprises, in addition to the actuating elements (resistors) 11 of known type, a plurality of identifying elements
10 (resistors or fuses) 21, placed in correspondence with the nozzles of the grid not used for printing, and also comprises a plurality of selecting elements (transistors) 12, in correspondence with the resistors or fuses 21 and the resistors 11.

The identifying elements 21 are therefore in correspondence with empty
15 positions of the grid ($M \times N$).

In each encoding assembly 24, each transistor 12, of known type, has the drain terminal that can be connected to one of the two terminals of the resistor 11 or of the fuse 21, the source terminal connected in common to the sources of the transistors 12 belonging to the same encoding assembly 24 and the gate
20 terminal connected to the contacts 23 corresponding to address selection lines (Address Line Select or addresses) $A_{i=1-N}$.

The resistors 11 and the fuses 21 belonging to an encoding assembly 24 have the second terminal connected in common and to a contact 23 corresponding to a primitive feeding line (Primitive Select or primitive) $P_{j=1-M}$.

25 In particular, each actuating assembly 14 and each encoding assembly 24 are activated by means of contacts or primitives $P_{j=1+M}$ and each transistor 12 is selected by means of contacts or addresses $A_{i=1+N}$.

The head according to the invention therefore comprises a driving and encoding circuit (20) having a grid-like structure, formed by the actuating 11,
30 identifying 21 and selecting 12 elements, having M rows and N columns in which:

- N is the number of selectable addresses A_i , and is equal to the sum of the number of resistors 11 and fuses 21; and

- M is the number of primitives P_j suitable for activation.

Generally, in the known heads, not all the available positions of the MxN grid are used for printing.

For instance, there are polychromatic heads in which the nozzles are divided into three colour groups, separated by gaps. The nozzles of each group are used for printing with ink of one of the three basic colours, and the gap is greater than the centre distance between two nozzles. The nozzles located in the gaps are not therefore used for printing, and the positions of the MxN grid corresponding to these nozzles are therefore free. In the head according to the invention, the circuitry part which is usually occupied by the resistors 11, placed in correspondence with the unused nozzles, may therefore be used to accommodate the identifying elements or fuses 21, that form the encoding circuit.

The fuses 21 are burnt, for instance at the time of production of the head, to store the desired characteristics.

In this way, a circuit is obtained for encoding of the head, using positions of the grid that would otherwise be unused, without adding any circuits and without using any extra area.

Take for example a colour printhead according to the invention, comprising 192 nozzles (31) and having 16 (M) primitives $P_{j=1 \rightarrow M}$ and 13 (N) addresses $A_{i=1 \rightarrow N}$ suitable for use.

This gives 208 ($16 \cdot 13 = 208$) positions available for driving the nozzles, of which only 192 are actually used.

Therefore 16 ($208 - 192 = 16$) positions remain free, and these are used, in accordance with a characteristic element of this invention, to accommodate, instead of resistors 11, the fuses 21 that form the encoding circuit.

As is known, the actuating elements 11 and selecting elements 12 are selected and commanded by a control circuit 40, external to the head, which comprises a "controller" 41, and a "head driver" 42, and is connected to the head by means of flexible circuits 44. (Fig.3).

The controller 41 sends, through buses 43, the signals containing the print code (DATA), decoding of the 4-bit addresses $A_{i=1 \rightarrow N}$ (CODE) and the timings (CONTROL LINE) of the nozzles to be selected, to the head driver 42, which in

turn converts them into current pulses suitable for activating ejection of the ink from the corresponding nozzles.

The control circuit 40 is connected to the head by means of flexible circuits 44 and in particular by means of the contacts $P_{j=1 \rightarrow M}$ and $A_{i=1 \rightarrow N}$ (Fig.3).

5 In the known heads, the control circuit 40 activates the ejection of ink by the nozzles of the head, according to the following order:

- activates for a given time, a first address A_i ;
- electrically powers with predetermined current pulses and through the contacts P_j , a predefined configuration of primitives;
- 10 - activates in sequence a second address;
- electrically powers, with predetermined current pulses and through the contacts P_j , a second predefined configuration of primitives; and so on in successive steps until activation of the N addresses is complete.

15 Through logic signals and in a known way the control circuit 40 of the printer, therefore, is suitable for activating in sequence the addresses A_{1-N} and, consequently, the N gates of the transistors 12 of the actuating assemblies 14 and of the encoding assemblies 24.

By means of the contacts P_j , the control circuit is suitable, in a known way, for electrically powering, upon variation of the addresses A_i , predefined
20 configurations of primitives so as to activate the ejection of ink by the nozzles corresponding to the active address A_i and to the configuration of primitives powered.

In the head according to the invention the encoding of the head is physically produced by activating, through the contacts A_i , the addresses
25 corresponding to the fuses 21 that have to be burnt, and by powering the corresponding primitives with pulses having a voltage and a duration suitable for burning the fuses (for example, voltage of 10 V and pulses of 3+4 μ s).

In this way, codes can be stored on each head corresponding to data relating to characteristics of the head, such as for instance droplet diameter and
30 speed, threshold energy.

The maximum pulse voltage +V applied to the contacts P_j in the encoding step must be less than, with a safety margin, the breakdown voltage (drain/substrate) of all the selecting elements 12 (MOS) connected to P_j to

avoid damaging the head. For instance, in heads with droplets of a few pl,

where the threshold energy is 1-2 μJ , the currents are less than 100 mA and the voltage applied in the encoding step is approx. 5-6 V, while the breakdown voltage of the transistors is approx. 15 V. In this way, there is a delta
 5 V of safety between the voltage needed to blow the fuses 21 and the breakdown voltage of the transistors 12.

According to a characteristic of this invention, to read the encoding, a known type of circuit called "nozzle check", which is part of the head driver 42, may be used without having to build a specific circuit or modify the driver, using
 10 the known control circuit 40, simply by modifying the head management software.

At the start of each printing step, before activating the ejection of ink, the control circuit 40 checks integrity of the resistors, by means of the function called "nozzles check" incorporated in the head driver 42.

15 During the nozzle check, the entire grid is scanned by sending to the primitives P_j a current called "check" current, to verify integrity of the resistors.

The check current is very low (10 mA) and is not sufficient to activate the ejection of ink by the nozzles, but simply verifies efficiency of the resistors.

At the same time, through the check current, the fuses 21 can be checked
 20 to see whether they are open or integral, and thus the encoding stored in the head is read.

Second embodiment

The second embodiment refers to the case of heads that have the grid ($M \times N$) full, i.e. that use all the $M \times N$ nozzles 31, activated by the corresponding
 25 resistors 11.

A printhead according to the invention comprises a driving and encoding circuit 20a, a grid, made up of a plurality of actuating assemblies 14, of known type, to which are added one or more addresses $A_{i=N+K}$; a fuse 21 and a corresponding transistor 12 are also made, connected to each of the addresses
 30 $A_{i=N+K}$ added to the grid circuit (Fig. 5).

Take by way of example a head comprising 208 nozzles 31 and having 16 (M) primitives $P_{j=1-M}$ and 13 (N) addresses $A_{i=1-N}$ suitable for use.

There are therefore 208 ($16 \times 13 = 208$) positions available for driving the

nozzles, all occupied by the resistors 11, and no free position remains to be used for the encoding circuit, that could accommodate the fuses 21.

In this case, unable to make use of empty positions of the grid $M \times N$ to accommodate the encoding circuit, one or more addresses $A_{I=N+K}$ are added to the grid circuit, to which a fuse 21 and a corresponding transistor 12 are connected.

In the example cited, of a head with 16 (M) primitives $P_{J=1-M}$ and 13 (N) addresses $A_{I=1-N}$, for each address $A_{I=N+K}$ added, there are 16 (M) positions available for accommodating a fuse 21 and a transistor 12, and therefore 16 encoding bits available for each new address.

The encoding circuits (fuses 21 and transistors 12) cannot be included in the grid, and are therefore placed in the area available between the contacts 23.

In the second embodiment also, reading of the encoding takes place in the nozzle check phase; in this case, in the nozzle check the driver 42 scans all the $N \times M$ positions occupied by the resistors 11 activating the nozzles, and K connections 44 more are needed between the controller 41 and the addresses $A_{I=N+K}$ added for the encoding, as depicted in Fig. 6.

The K addresses added are therefore only activated in the step of reading the encoding and in that of physically producing the encoding, which takes place in the same way as described in the first embodiment.

The printhead, according to the invention, offers numerous advantages in comparison with the known art. In fact, the encoding circuit uses parts of the existing driving circuit and contacts, without changing them or with a limited increase in the surface area occupied by this circuit. Furthermore, for reading of the encoding of the head, the nozzle check step already present in operation of the head is used, without slowing down the printing preliminaries.

Naturally, without prejudice to the principle of the invention, the embodiments and construction details may be amply varied with respect to what has been described and illustrated purely by way of non-restrictive example, without departing from the scope of this invention.

CLAIMS

1. Ink jet printhead comprising:

a driving and encoding circuit (20) having a grid-like structure including a plurality of inputs (23) and a plurality of selecting elements (12),

5 a plurality of actuating elements (11) associated with said driving and encoding circuit (20) and suitable for being selectively addressed and commanded by said selecting elements (12) in response to given command signals received through said plurality of inputs (23), so as to cause the ejection of ink droplets from said printhead, and

10 at least one identifying element (21) of said printhead,

characterized in that each of said identifying elements (21) of said printhead is associated with a corresponding selecting element (12) of said driving and encoding circuit (20), to be selectively addressed and identified in response to corresponding identifying signals received through said plurality of inputs (23).

2. Ink jet printhead according to claim 1, **characterized in that** said plurality of actuating elements (11) and each of said identifying elements (21) are suitable for being sounded through corresponding control signals received through said plurality of inputs (23), during a preliminary checking step, the purpose of which is to identify said printhead and to confirm the correct operation of said actuating elements (11).

3. Printhead according to claim 1, **characterized in that** said actuating elements (11) are resistors and said printhead is of the thermal, bubble type for activating the ejection of said ink droplets.

25 4. Head according to claim 1, **characterized in that** said identifying elements (21) are made of a plurality of resistors each one having a resistivity that has been selectively set during the manufacturing process of said printhead, depending on its characteristics.

5. Head according to claim 1, **characterized in that** said identifying elements (21) occupy positions of the grid that are located in correspondence with nozzles (31) not used for printing.

30 6. Ink jet printhead comprising:

a driving and encoding circuit (20) having a grid-like structure, and

including a plurality of inputs (23), a plurality of selecting elements (12), and a plurality of actuating elements (11) suitable for being selectively addressed and commanded by said selecting elements (12) in response to given command signals received through said plurality of inputs (23), so as to cause the ejection of ink droplets from said printhead, and

at least one identifying element (21) of said printhead,

characterized in that each of said identifying elements (21) of said printhead is associated with a corresponding selecting element (12) of said driving and encoding circuit (20), for being selectively addressed and identified in response to corresponding identifying signals received through said plurality of inputs (23).

7. Integrated ink jet printhead comprising:

a plurality of actuating elements (11) for causing the ejection of ink droplets from said printhead,

a driving and encoding circuit (20), having a grid-like structure, for selectively addressing and commanding each of said actuating elements (11), said grid-like structure being organized into rows and columns that define a plurality of nodes corresponding to said actuating means, and

one or more identifying elements (21) of said head,

characterized in that said one or more identifying elements (21) of said head correspond to nodes arranged, one behind the other, along a given row or column of said grid-like structure, and in that said one or more identifying elements (21) are also provided for being scanned, together with said actuating elements (11), during a preliminary checking step, the purposes of which are both to identify said printhead and to confirm correct operation of said actuating elements (11).

1/5

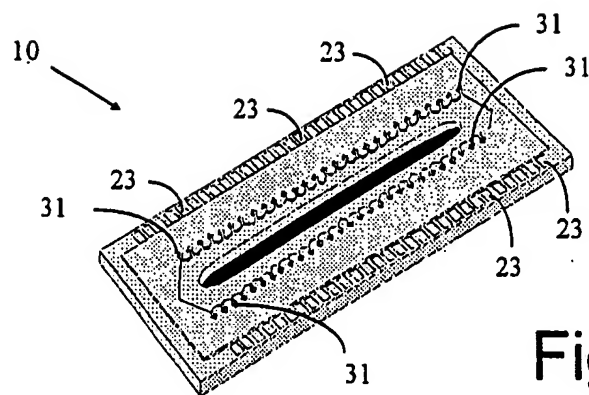


Fig. 1


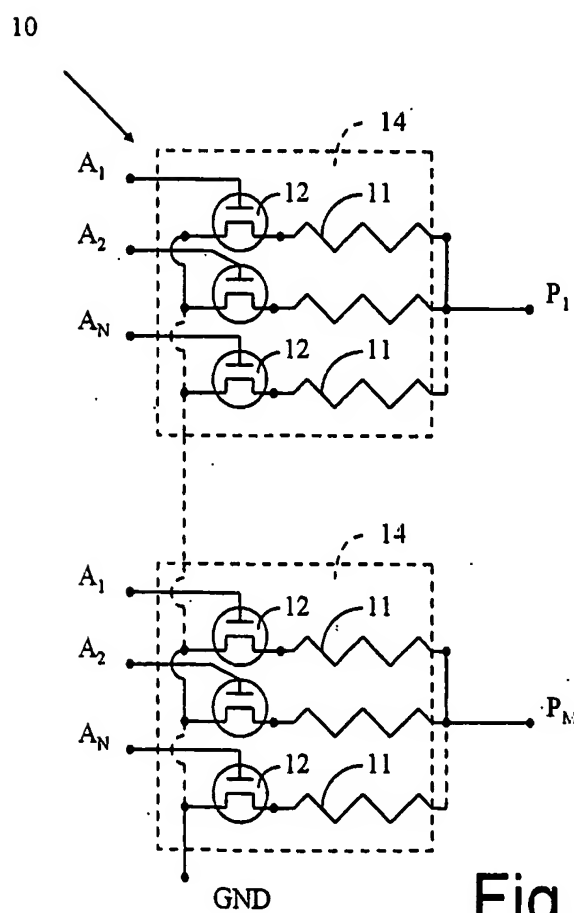


Fig. 2

2/5

Fig. 3

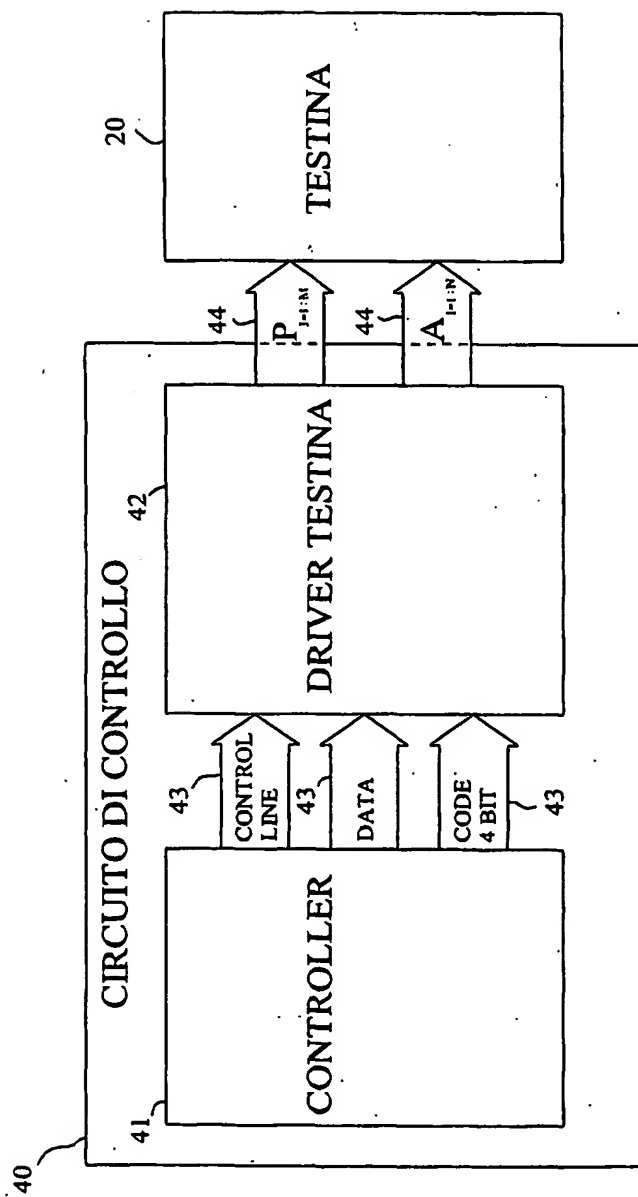

3/5

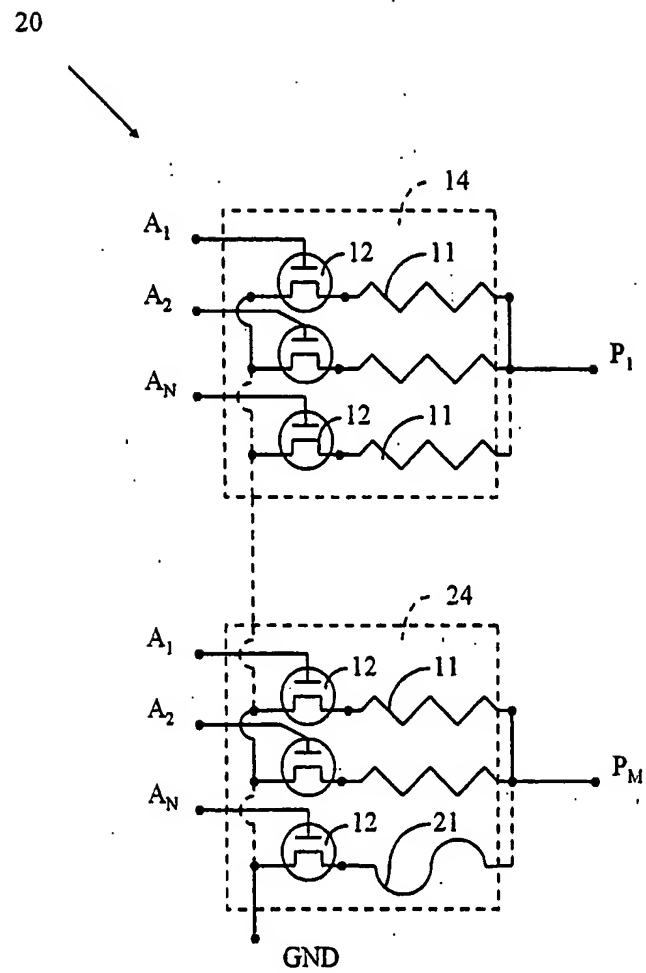


Fig. 4

4/5

20a

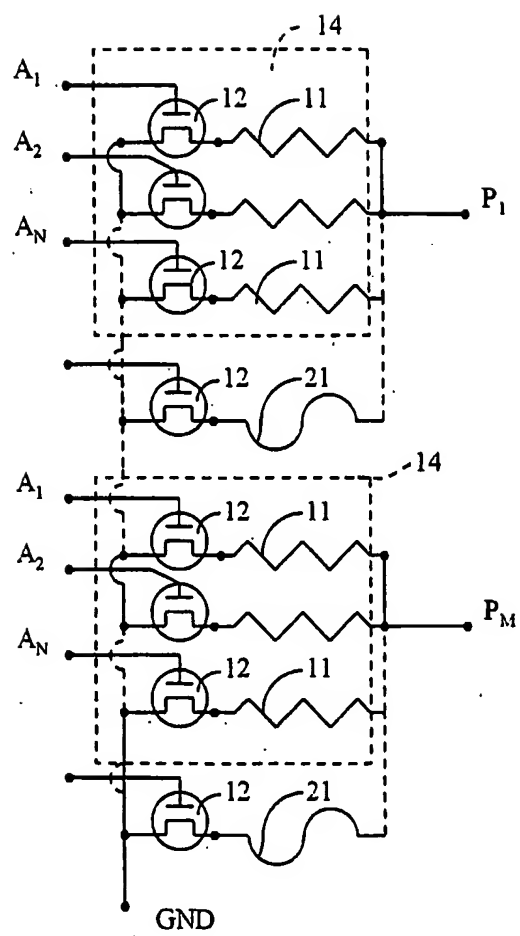


Fig.5

5/5

Fig. 6

